

CO₂ Component Description




A UTC Fire & Security Company

3/8 inch Check Valve

Effective: February 2007

K-81-5100

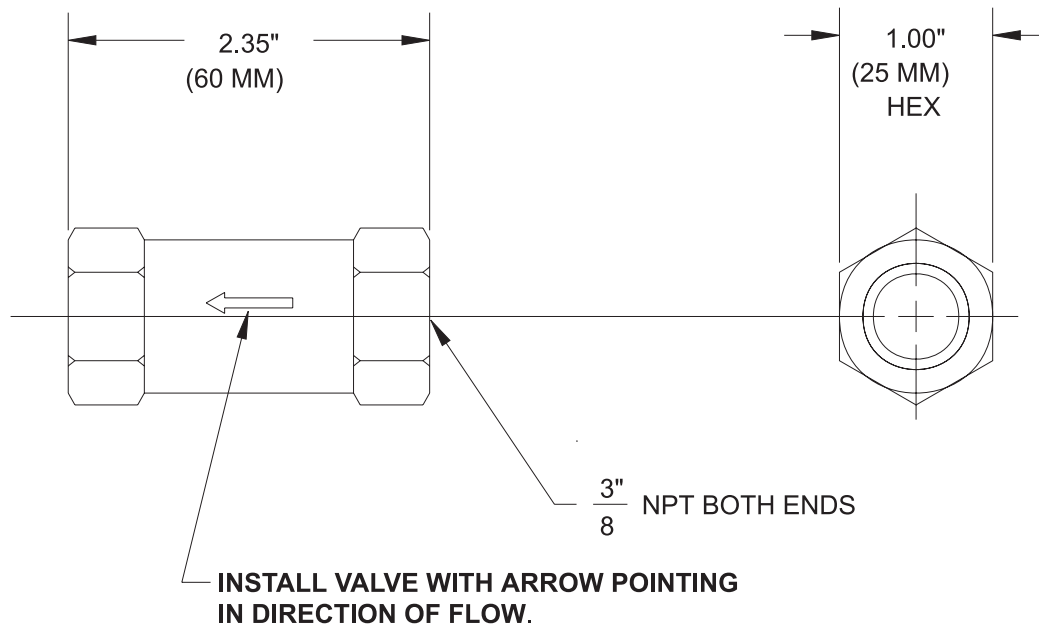

MATERIALS

BODY: BRASS

SEAL: BUNA-N

TECHNICAL DATA

WORKING PRESSURE: 0 TO 5000 PSI (0 TO 345 BARS)

PROOF PRESSURE: 10,000 PSI (690 BARS)

CRACKING PRESSURE: 2 TO 4 PSI (.14 TO .28 BARS)

OPERATING TEMPERATURE: -40°F TO 250°F (-40°C TO 121°C)

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly.
If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.