

CO₂ Component Description




A UTC Fire & Security Company

Flex Hose - 3/4 in.

Effective: February 2007

K-81-1090

P/N: 251821

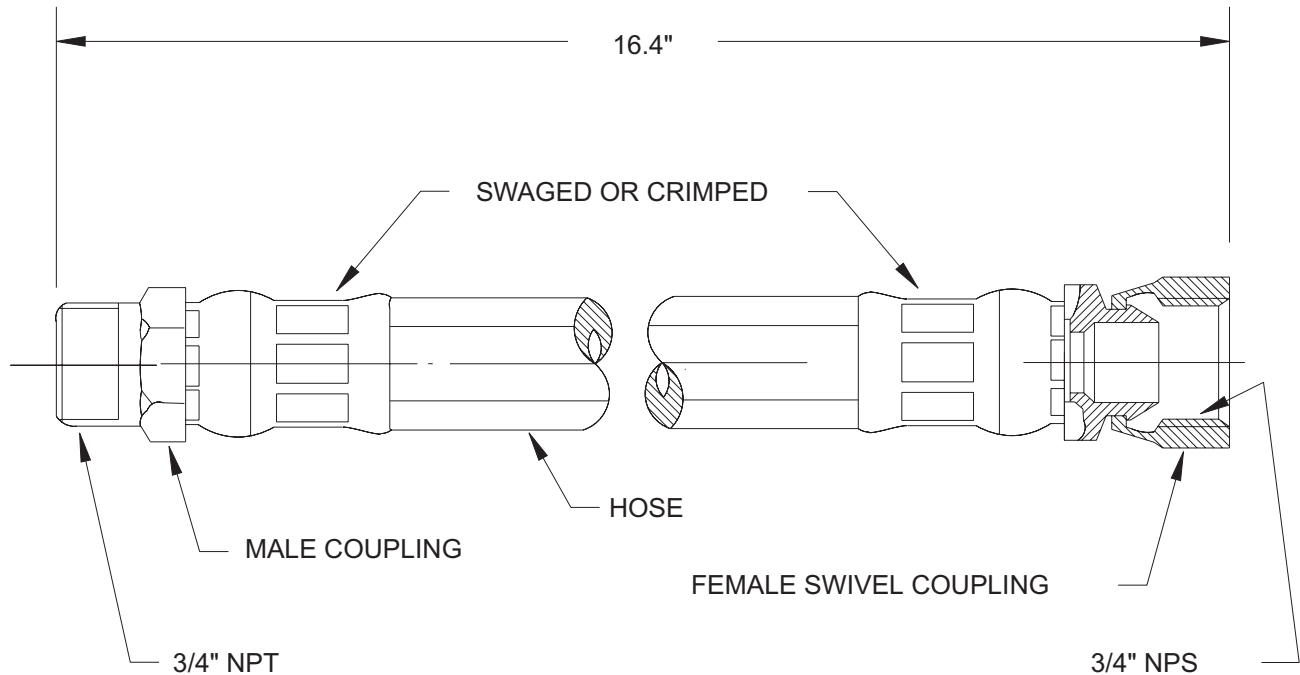

MINIMUM BURST PRESSURE: 11000 PSI (758 BAR)

HYDROTEST: 4000 PSI (276 BAR)

TEMPERATURE RATING: -40°F TO +200°F (-40°C TO 93°C)

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly.
If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.