

CO₂ Component Description



A UTC Fire & Security Company


1/4 inch Flexible Actuation Hoses

Effective: February 2007

K-81-5070

PART NO.	A*
264986	30
264987	22

* DIMENSIONS ARE IN INCHES

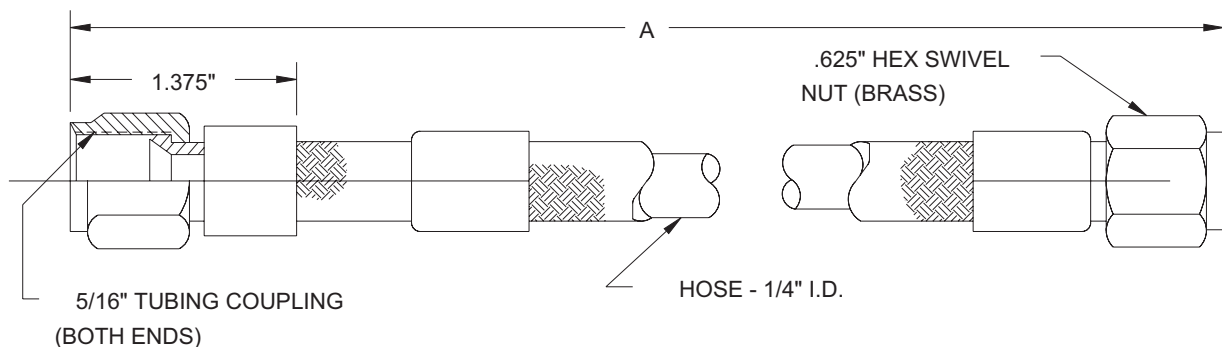

MATERIALS

HOSE: WIRE BRAIDED, TEFLON LINING (CRES T304)

COUPLINGS: BRASS

MINIMUM BURST PRESSURE: 12,000 PSIG

OPERATING PRESSURE: 3000 PSIG

TEST PRESSURE: 4500 PSIG

MINIMUM BEND RADIUS 2.5 in.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly.
If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.