


# Wheeled Carbon Dioxide

## Fire Extinguishers

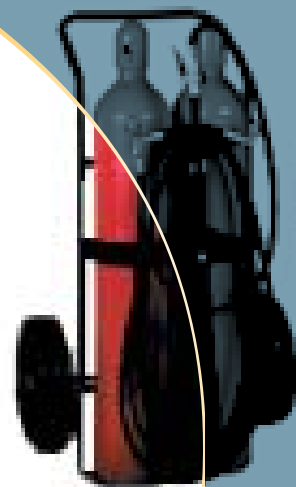

### Features

- UL Listed
- Available in Two Sizes: 50 lb. and 100 lb.
- Single person operation
- Fitted with squeeze-grip control valve for ease of operation
- Large 16" wheels provide mobility on smooth surfaces
- Durable high-density polyethylene horn
- Heavy-duty frame with corrosion-resistant, black enamel finish
- Quick release horn/valve assembly retainer clip
- Fitted with a diffuser orifice to minimize recoil and valve protective shipping cap
- Six year warranty

### Wheeled Carbon Dioxide Fire Extinguisher Models

- K50C
- K100C

UL Listed  
Six Year Warranty



***Carbon Dioxide is a Clean Agent that Leaves No Residue***—The Kidde Fire Systems Wheeled Carbon Dioxide Extinguishers provide excellent protection for certain flammable liquids and energized electrical equipment. With a squeeze-grip control valve design, the extinguishers can be operated by a single person.

The Wheeled Carbon Dioxide Extinguishers are generally reserved for indoor use where wind and drafts will not disperse the discharge pattern.

## Specifications

|                           |             | <b>K50C</b>     | <b>K100C</b>    |
|---------------------------|-------------|-----------------|-----------------|
| <b>Nominal Capacity</b>   | <b>lb.</b>  | 50              | 100             |
|                           | <b>kg</b>   | 22.68           | 45.36           |
| <b>UL Fire Rating</b>     |             | 20B:C           | 20B:C           |
| <b>Agent Type</b>         |             | CO <sub>2</sub> | CO <sub>2</sub> |
| <b>Item Part Number</b>   |             | 88-24391        | 88-24393        |
| <b>Valve Material</b>     |             | Brass           | Brass           |
| <b>Shell Material</b>     |             | Steel           | Steel           |
| <b>Shipping Weight</b>    | <b>lb.</b>  | 271             | 446             |
|                           | <b>kg</b>   | 122.92          | 202.30          |
| <b>Operating Pressure</b> | <b>PSI</b>  | 850             | 850             |
|                           | <b>Bar</b>  | 58.61           | 58.61           |
| <b>Temperature Range</b>  | <b>°F</b>   | -40 to 120      | -40 to 120      |
|                           | <b>°C</b>   | -40 to 49       | -40 to 49       |
| <b>Discharge Time</b>     | <b>sec.</b> | 30              | 60              |
| <b>Discharge Range</b>    | <b>ft.</b>  | 15              | 15              |
|                           | <b>m</b>    | 4.57            | 4.57            |
| <b>Unit Height</b>        | <b>in.</b>  | 52              | 52              |
|                           | <b>cm</b>   | 132.08          | 132.08          |
| <b>Unit Width</b>         | <b>in.</b>  | 21.5            | 32.0            |
|                           | <b>cm</b>   | 54.61           | 81.28           |
| <b>Shell Diameter</b>     | <b>in.</b>  | 9               | 9               |
|                           | <b>cm</b>   | 22.86           | 22.86           |
| <b>UL Listed</b>          |             | Yes             | Yes             |

400 Main Street  
Ashland, MA 01721  
Ph: (508) 881-2000  
Fax: (508) 881-8920  
[www.kiddefiresystems.com](http://www.kiddefiresystems.com)