

Industrial Dry Chemical

Total-Flooding Nozzle



Effective: April 2002


K-83-012

P/N: 83-100005-001

DESCRIPTION

The Total-Flooding (TF) Nozzle is designed to uniformly discharge dry chemical throughout an enclosed volume. This nozzle is to be mounted at ceiling level (unless otherwise listed) with the orifice tip pointed vertically down. The TF Nozzle is also used to protect the work area volume for open face spray booth applications and in automotive vehicle spray booth applications.

Each TF Nozzle is factory-equipped with a blow-off cap to protect the nozzle orifices and prevent moisture buildup in the discharge piping.

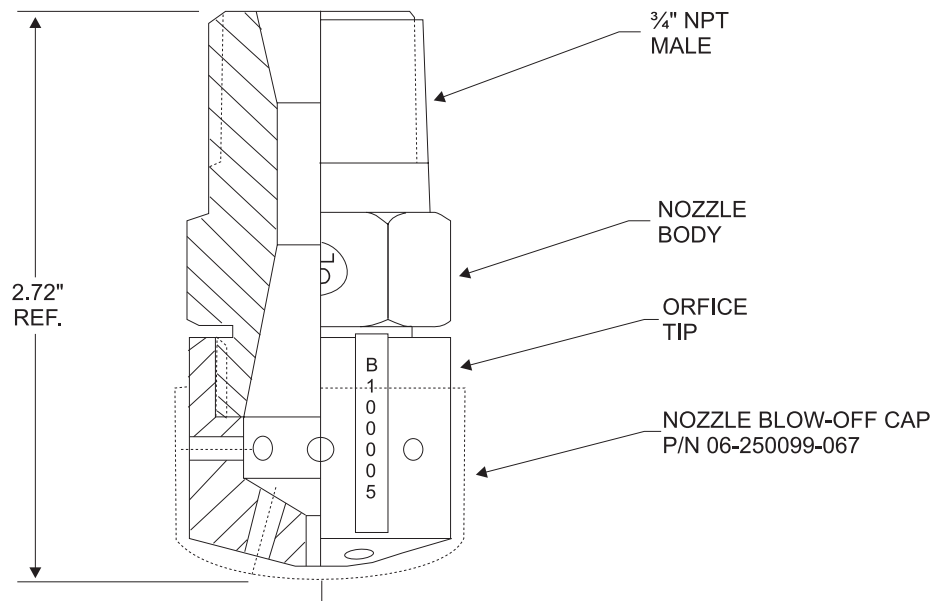

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL INC., Ashland, MA 01721. Telephone: (508) 881-2000

Kidde Fire Systems
400 Main Street
Ashland, MA 01721 USA
Tel: (508) 881-2000
Fax: (508) 881-8920
<http://www.kiddefiresystems.com>