

Kidde Fire Protection Inert Gas System (400 Series)



Component Description:

Quick Connect Cables

Effective: August 2018
KDS 38-400005-10X Rev AA

FEATURES


- For Approvals, see the "COMPATIBILITY" table.
- REACH and RoHS compliant
- For use with Normally Open (Under Pressure) Gauges

DESCRIPTION

Quick Connect cables provide a fast method of wiring the pressure gauges of the Release Unit and Slave Cylinder Gauge Assemblies.


ORDERING INFORMATION

Part Number	Description
38-400005-100	Elbow (PG7) Plug x 2 Cable, Dual Core (0.34mm x 300mm) x Quick Connects (Male & Female)
38-400005-101	Gauge Signal Line - Quick Connect Terminal Plug (MALE)
38-400005-102	Gauge Signal Line - Quick Connect (MALE) Connector with 3m Fly lead (Dual Core Cable)
38-400005-103	Quick Connect (Male) x Dual Core (0.34mm x 1000mm) Fly-Lead
38-400005-105	Quick Connect (Female) x Dual Core (0.34mm x 1000mm) Fly-Lead

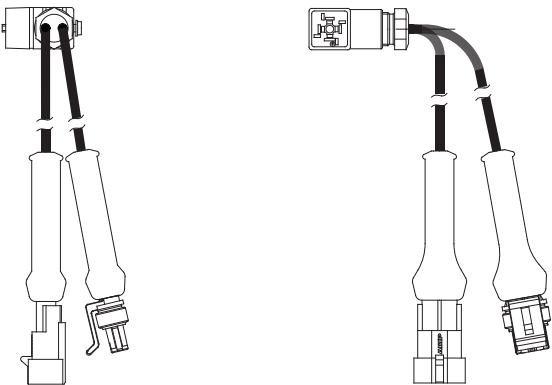

COMPATIBILITY

Series	DIOM P/N	Approvals*
Kidde Fire Protection IGS	06-237518-001	LPCB
* For additional listings, contact Kidde Fire Protection		

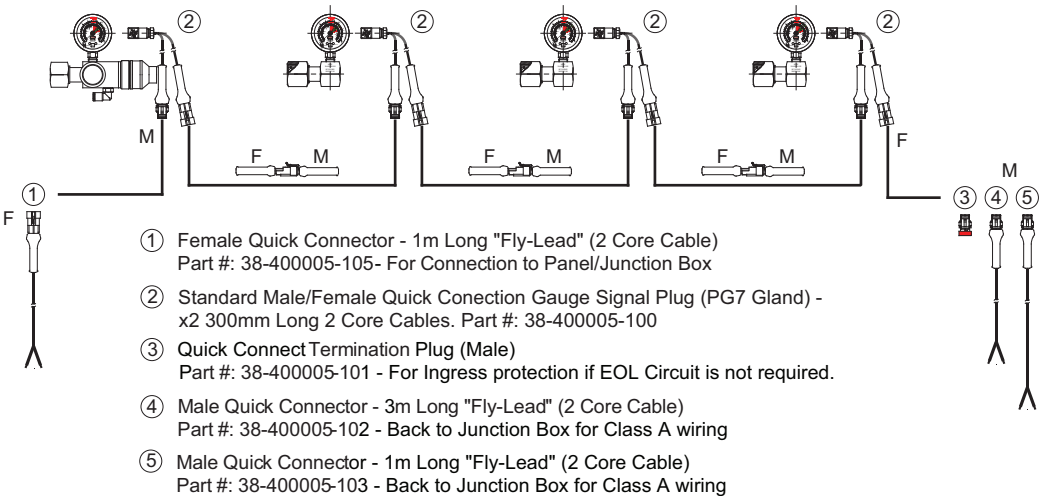

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. believes this data to be accurate, but it is published and presented without any guarantee or warranty whatsoever. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The fire suppression system design, installation, maintenance, service and troubleshooting must be performed by trained, authorized Kidde Fire Protection distributors for the product to work correctly. If you need more information on this product, or if you have a particular problem or question, contact Kidde Fire Protection, Buckinghamshire, HP14 3SX, United Kingdom. Telephone: +44 (0)1494 480410.

©2018 Kidde-Fenwal, Inc.

KP-38-2125

Kidde Fire Protection
1st Floor, Stokenchurch House,
Oxford Road, Stokenchurch,
Buckinghamshire,
HP14 3SX, United Kingdom
Tel: +44 (0)1494 480410
www.kfp.co.uk