

Kidde Fire Protection Inert Gas System (400 Series)



Component Description:

Discharge Hoses

Effective: August 2018
KDS 38-400330-X10 Rev AA

FEATURES

- For Approvals, see the “COMPATIBILITY” table.
- *REACH and RoHS compliant*

DESCRIPTION

Use the discharge hoses to route the agent from the storage cylinders to the discharge piping. The hose is connected to the discharge outlet of the agent cylinder valve and terminates at the system piping or discharge manifold.

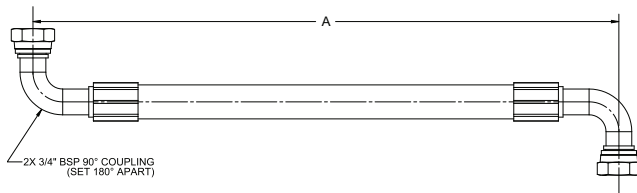


Figure 1. Discharge Hose with 90° to 90° Couplings



ORDERING INFORMATION

Part Number	Connection Angle	Dimension A	Min. Bend Radius
38-400330-410	90° to 90°	410 mm	240mm (9.6")
38-400330-510	90° to 90°	510 mm	240mm (9.6")

COMPATIBILITY

Series	DIOM P/N	Approvals*
Kidde Fire Protection IGS	06-237518-001	LPCB
* For additional listings, contact Kidde Fire Protection		

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. believes this data to be accurate, but it is published and presented without any guarantee or warranty whatsoever. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The fire suppression system design, installation, maintenance, service and troubleshooting must be performed by trained, authorized Kidde Fire Protection distributors for the product to work correctly. If you need more information on this product, or if you have a particular problem or question, contact Kidde Fire Protection, Buckinghamshire, HP14 3SX, United Kingdom. Telephone: +44 (0)1494 480410.

©2018 Kidde-Fenwal, Inc.

KP-38-2170

Kidde Fire Protection
1st Floor, Stokenchurch House,
Oxford Road, Stokenchurch,
Buckinghamshire,
HP14 3SX, United Kingdom
Tel: +44 (0)1494 480410
www.kfp.co.uk