



MERCEDES
TEXTILES LIMITED
FORESTRY PRODUCTS


WICK® FT-200



PORTABLE FLOATING HIGH PRESSURE FIRE PUMP

- The floating fire pump meets the rugged demands of forestry services and also used for marine service, dewatering, pool maintenance, environmental clean-up and irrigation.
- Unique hard anodized aluminum impeller and housing
- Automatic throttle control
- Unique electronic overspeed protection
- Pump end is designed for easy field maintenance
- Unique fuel lever gauge
- Face-type mechanical seal is standard. No adjustment required
- Built-in intake screen
- Water-resistant air cleaner and muffler
- 8 horsepower, 8.20 cu. in. (134cc) displacement, air-cooled
- Recoil hand starter
- Carburetor with integral fuel pump
- Solid-state ignition
- Electronic over-speed protection cut-out switch
- Nikasil plated cylinder bore
- Ball bearing-supported crankshaft
- Roller bearing-equipped connecting rod
- Uses unleaded gasoline and oil mixed
- Automatic float controlled throttle

Performance standard correction as per SAE J1349; 60° F / 15.5° C; Baro 29.92 in. / 101.3 mB

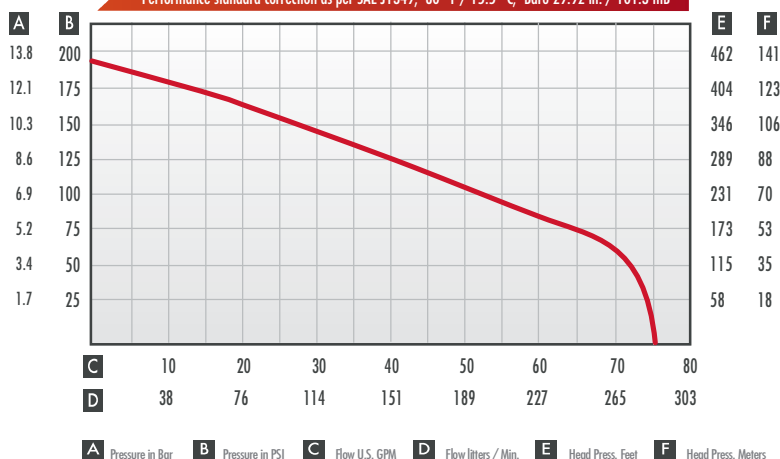

WEIGHT & DIMENSIONS

LENGTH	29.5"	74.9 CM
WIDTH	20.0"	50.8 CM
HEIGHT	16.5"	41.9 CM
WEIGHT (DRY)	43 LBS	19.5 KG
DISCHARGE	1 1/2"	38 mm NPSH*
* Standard NPSH threads, other discharge threads available		

ENGINE

HYDROWICK	2 STROKE
POWER	8 HP
CYLINDER	NIKASIL
IGNITION	ELECTRONIC
FUEL TANK	5 QUART 4.7 LITER

Specifications subject to change without notice

5838 Cypihot
Saint Laurent, QC
Canada, H4S 1Y5

PHONE 514.335.4337
PHONE 877.937.9660
FAX 514.335.9633

mercedestextiles.com

Distributor: TTL LLC
3979 NW 7th Place, Deerfield Beach, FL 33442 USA
Telephone: +1-561-3311868 | Fax: +1-270-6388768
Email: Sales@TTLCompany.com | TTLCompany.com

INNOVATION DELIVERED.



WICK® FT-200

BID SPECIFICATION FOR PORTABLE HIGH PRESSURE FLOATING PUMP

The pump must come with the following features and meet the minimum specifications mentioned below

- Hard anodized aluminum impeller and housing
- Automatic throttle control
- Electronic overspeed protection
- Pump end design for easy field maintenance
- Fuel lever gauge
- Face-type mechanical seal
- Built-in intake screen
- Water-resistant air cleaner and muffler
- 8 horsepower, 8.20 cu. in. (134cc) displacement, air-cooled engine
- Recoil hand starter
- Carburetor with integral fuel pump
- Solid-state ignition
- Electronic over-speed protection cut-out switch
- Nikasil plated cylinder bore
- Ball bearing-supported crankshaft
- Roller bearing-equipped connecting rod
- Unleaded gasoline and oil mixed
- Automatic float controlled throttle
- The flow and pressures must meet the peak performance chart numbers shown on previous page

WICK® FT-200

Part#	Description
71WICKFT-200	Wick FT-200 Fire Pump